

SPINWORX®



➡ **AND YET IT MOVES**

Galileo Galilei



THE ROTATING INSERT

SPINWORX® – the new system of milling cutters with round inserts puts into question, which has been an effective operation for decades: the insert has to be rigidly coupled to the cutter body. In case it would be loose in its insert-seat, it would break, earlier or later! Not at all with SPINWORX® – the insert rotates and thus, manual re-location becomes redundant. Through the rotating insert in the seat of the milling cutter, notch wear is not occurring any more; so you get a 100%-utilization of the existing cutting edge and you are able to use ma-

ximum capacity without any loss. SPINWORX® sets new standards: reducing your downtimes and nonproductive times to zero. Enable yourself by using our SPINWORX®-system to most efficient machining of your components and increase your machining capacity considerably. We offer our SPINWORX®-tools as threaded shank end mill bodies and shell-type milling cutters, as well as with our patent protected DuoPlug®-connection for highest concentricity and maximum rigidity.





Besides those already mentioned advantages of extremely reduced insert wear and extended tool life, this system has further positive effects: According to the cutting conditions, a reduced chip compression leads to power consumption. This again effects increased protection of the machine spindle. And it leads to quiet running and reduction of noise emissions. Like for our range of conventional inserts, the extent of cutter diameters for the **SPINWORX®**-System starts at 25 mm and ends up with 200 mm diameter and a modification of your nc-programs is redundant.

MISJUGDEMENTS OF HISTORY:

+++“Horses will survive for ever, however motor vehicles are only a temporarily fashion.”+++

(The president of the Michigan Savings Bank 1903)

+++“The worldwide demand for motor vehicles is not going to exceed one million pieces...”+++

(Gottlieb Daimler, inventor, 1901)

+++“I believe, there is a need on the global market for only 5 computers.”+++

(Thomas J. Watson Senior, Head of IBM)

+++“This wall will persist for the next 50 as well as 100 years,...”+++

(Erich Honecker, Chairman of the Council of State of GDR, Januar 1989)

+++“Inserts have to be rigidly coupled with the cutter body!”+++

YOU PROFIT FROM THIS SUMMARY OF ADVANTAGES:

- ⊕ 100 % usage of the total insert periphery
- ⊕ fourfold increase in tool life*
- ⊕ a four times higher chip volume is possible through un-interrupted production processes*
- ⊕ substantial reduced downtimes of your machines: no manual re-locating of inserts is necessary
- ⊕ obviously decreased chip compression leads to a reduction of power consumption and beyond that, protects your machine spindle



*according to cutting conditions






➞ CONTENT

➞ Spinworx® - radius 5 mm	
dimensions and operation data.....	6
➞ Spinworx® - radius 6 mm	
dimensions and operation data.....	8
➞ Spinworx® - radius 8 mm	
dimensions and operation data.....	10
➞ Spinworx® - radius 10 mm	
dimensions and operation data.....	12
➞ from practice to practice	14




DIMENSIONS AND OPERATION DATA

Spinworx® - radius 5 mm

MILLING CUTTER BODIES		Catalogue No.	d ₁	d	r	d ₂	d ₃	l ₂	l ₃	z
Duo Plug®										
	3 25 200/7 SG DR	25	10	5	M 16	23,5	2,5	35	3	
Threaded shank end mill bodies										
	3 25 200/7 DR	25	10	5	M 12	21	2,5	32,5	3	
	5 35 200/7 DR	35	10	5	M 16	29	2,5	43	5	
Shell type milling cutter bodies										
	7 52 310/7 DR	52	10	5	22	40	2,5	52,5	7	

Thread stud bolt supports have left hand Thread!


Accessories

ACCESSORIES	Catalogue No.	Description	Dimensions			
	TV 1-5	screwdriver torque Vario®-S with window scale	NM 1,0 - 5,0	with scale		
	T8 500	Torx-interchangeable bit	T 8	L175	max. 1,3 Nm	
	T8 502	Torx magicspring interchangeable blade	T8	L175	max. 1,3 Nm	

Clamping torque for torx size T8 M₆: 1,0 Nm





Spinworx®-inserts



INDEXABLE INSERTS							
	Catalogue No.	DIN-Identification	kind for material	kind of chips	d	r	
	02 10 8A0 DR	ROHX10	steel/cast iron	short-chipping	10	5	
	02 10 8B0 DR	ROHX10	steel	long-chipping	10	5	

Inserts and pins only available as kits. Threaded stud bolt supports have left hand thread!

Cutting Speeds V_c in m/min









MATERIAL		d	r	kind of machining	*8A0 DR	*8B0 DR
Steel		10	5	roughing finishing	100 – 300 150 – 350	100 – 300 150 – 350
Cast Iron		10	5	roughing finishing	120 – 220 150 – 250	

Application data (f_z/a_p)

MATERIAL		d	r	machining rates	*8A0 DR	*8B0 DR
Steel		10	5	f_z (mm) a_p (mm)	0,15 – 0,7 0,1 – 1,0	0,2 – 0,7 0,2 – 1,5
Cast Iron		10	5	f_z (mm) a_p (mm)	0,15 – 0,7 0,1 – 1,0	

These speed and feed values are approximate.

Extended operation data

axial plunging into solid block		ramping		circular milling into solid block	
					
			 		 
Cutter diam. ϕd , mm	x max. mm		a° y mm		D_{min} D_{max} mm
25	2,5		< 19,7 7		32 50
35	2,5		< 8,4 17		52 70
52	2,5		< 4,2 34		86 104



x maximum plunge depth
 f_z see operation data table, but reduce value to 30%

y minimum travel
 a_p/f_z see operation data table




D_{min} minimum bore diameter depending on cutter diameter
 D_{max} maximum bore diameter depending on cutter diameter

DIMENSIONS AND OPERATION DATA

Spinworx® - radius 6 mm

MILLING CUTTER BODIES		Catalogue No.	d ₁	d	r	d ₂	d ₃	l ₂	l ₃	z
Threaded shank end mill bodies										
	4 35 200/7 DR	35	12	6	M 16	29	3	42,5	4	
Shell type milling cutter bodies										
	6 52 310/7 DR	52	12	6	22	40	3,5	52,5	6	
	7 66 310/7 DR	66	12	6	27	48	3,5	52,5	7	

Accessories

ACCESSORIES	Catalogue No.	Description	Dimensions			
	TV 1-5	screwdriver torque Vario®-S with window scale	Nm 1,0 - 5,0	with scale		
	T10 500	Torx-interchangeable bit	T 10	L 175	max. 3,8 Nm	
	T10 502	Torx magic spring interchangeable blade	T 10	L 175	max. 3,8 Nm	

Clamping torque for torx size T10 M₆: 1,4 Nm

Inserts and pins only available as kits.







Cutting Speeds V_c in m/min

Age Group	Percentage
18-24	15%
25-34	20%
35-44	25%
45-54	20%
55-64	15%
65-74	10%
75-84	5%
85+	5%

These speed and feed values are approximate.

Extended operation data



Country	Year	Value
Algeria	2010	0.0000
Algeria	2011	0.0000
Algeria	2012	0.0000
Algeria	2013	0.0000
Algeria	2014	0.0000
Algeria	2015	0.0000
Algeria	2016	0.0000
Algeria	2017	0.0000
Algeria	2018	0.0000
Algeria	2019	0.0000
Algeria	2020	0.0000
Algeria	2021	0.0000
Algeria	2022	0.0000
Algeria	2023	0.0000
Algeria	2024	0.0000
Algeria	2025	0.0000
Algeria	2026	0.0000
Algeria	2027	0.0000
Algeria	2028	0.0000
Algeria	2029	0.0000
Algeria	2030	0.0000
Algeria	2031	0.0000
Algeria	2032	0.0000
Algeria	2033	0.0000
Algeria	2034	0.0000
Algeria	2035	0.0000
Algeria	2036	0.0000
Algeria	2037	0.0000
Algeria	2038	0.0000
Algeria	2039	0.0000
Algeria	2040	0.0000
Algeria	2041	0.0000
Algeria	2042	0.0000
Algeria	2043	0.0000
Algeria	2044	0.0000
Algeria	2045	0.0000
Algeria	2046	0.0000
Algeria	2047	0.0000
Algeria	2048	0.0000
Algeria	2049	0.0000
Algeria	2050	0.0000
Algeria	2051	0.0000
Algeria	2052	0.0000
Algeria	2053	0.0000
Algeria	2054	0.0000
Algeria	2055	0.0000
Algeria	2056	0.0000
Algeria	2057	0.0000
Algeria	2058	0.0000
Algeria	2059	0.0000
Algeria	2060	0.0000
Algeria	2061	0.0000
Algeria	2062	0.0000
Algeria	2063	0.0000
Algeria	2064	0.0000
Algeria	2065	0.0000
Algeria	2066	0.0000
Algeria	2067	0.0000
Algeria	2068	0.0000
Algeria	2069	0.0000
Algeria	2070	0.0000
Algeria	2071	0.0000
Algeria	2072	0.0000
Algeria	2073	0.0000
Algeria	2074	0.0000
Algeria	2075	0.0000
Algeria	2076	0.0000
Algeria	2077	0.0000
Algeria	2078	0.0000
Algeria	2079	0.0000
Algeria	2080	0.0000
Algeria	2081	0.0000
Algeria	2082	0.0000
Algeria	2083	0.0000
Algeria	2084	0.0000
Algeria	2085	0.0000
Algeria	2086	0.0000
Algeria	2087	0.0000
Algeria	2088	0.0000
Algeria	2089	0.0000
Algeria	2090	0.0000
Algeria	2091	0.0000
Algeria	2092	0.0000
Algeria	2093	0.0000
Algeria	2094	0.0000
Algeria	2095	0.0000
Algeria	2096	0.0000
Algeria	2097	0.0000
Algeria	2098	0.0000
Algeria	2099	0.0000
Algeria	2100	0.0000
Algeria	2101	0.0000
Algeria	2102	0.0000
Algeria	2103	0.0000
Algeria	2104	0.0000
Algeria	2105	0.0000
Algeria	2106	0.0000
Algeria	2107	0.0000
Algeria	2108	0.0000
Algeria	2109	0.0000
Algeria	2110	0.0000
Algeria	2111	0.0000
Algeria	2112	0.0000
Algeria	2113	0.0000
Algeria	2114	0.0000
Algeria	2115	0.0000
Algeria	2116	

axial plunging into solid block		ramping		circular milling into solid block	
					
					
Cutter diam $\varnothing d_1$ mm	x max. mm	a°	y mm	D_{min} mm	D_{max} mm
35	3	< 13	13	46	70
52	3,5	< 5,7	30	82	104
66	3,5	< 3,9	44	110	132



D_{\min}	minimum bore diameter depending on cutter diameter
D_{\max}	maximum bore diameter depending on cutter diameter

DIMENSIONS AND OPERATION DATA

Spinworx® - radius 8 mm


MILLING CUTTER BODIES		Catalogue No.	d ₁	d	r	d ₂	d ₃	l ₂	l ₃	z
Threaded shank end mill bodies										
	3 35 201/7 DR	35	16	8	M16	29	4	43,5	3	
Shell type milling cutter bodies										
	4 52 300/7 DR	52	16	8	22	40	3,8	53	4	
	5 52 300/7 DR	52	16	8	22	40	3,8	53	5	
	6 66 300/7 DR	66	16	8	27	48	3,8	53	6	
	8 80 300/7 DR	80	16	8	27	60	3,8	53	8	
	7 100 300/7 DR	100	16	8	32	70	4,8	53	7	
	9 100 300/7 DR	100	16	8	32	70	4,8	53	9	

Accessories

ACCESSORIES	Catalogue No.	Description	Dimensions			
	TV 1-5	screwdriver torque Vario®-S with window scale	Nm 1,0 - 5,0	with scale		
	T15 500	Torx-interchangeable bit	T 15	L 175	max. 5,5 Nm	
	T15 502	Torx magic spring interchangeable blade	T15	L 175	max. 5,5 Nm	

Clamping torque for torx size T15 M₆: 1,8 Nm

Spinworx®-inserts

INDEXABLE INSERTS	Catalogue No.	DIN-Identification	kind for material	kind of chips	d	r
	04 16 8A0 DR	ROHX16	Steel/Cast Iron	short-chipping	16	8
	04 16 8B0 DR	ROHX16	Steel	long-chipping	16	8

Inserts and pins only available as kits.



Cutting Speeds V_c in m/min

MATERIAL		d	r	kind of machining	*8A0 DR	*8B0 DR
Steel		16	8	roughing finishing	100 – 300 150 – 350	100 – 300 150 – 350
Cast Iron		16	8	roughing finishing	120 – 220 150 – 250	

Application data (f_z/a_p)

MATERIAL		d	r	machining rates	*8A0 DR	*8B0 DR
Steel		16	8	f_z (mm) a_p (mm)	0,2 – 0,5 0,2 – 3,0	0,25 – 1,0 0,2 – 3,0
Cast Iron		16	8	f_z (mm) a_p (mm)	0,2 – 0,5 0,2 – 3,0	

These speed and feed values are approximate.

Extended Operation Data

axial plunging into solid block		ramping		circular milling into solid block	
Cutter diam ϕd_1 mm	x max. mm		a° y mm		D_{min} mm
35	4		< 38,7		40
52	3,8		< 10,3		74
66	3,8		< 6,4		102
80	3,8		< 4,6		130
100	4,8		< 3,3		170


x maximum plunge depth
 f_z see operation data table, but reduce value to 30%

y minimum travel
 a_p/f_z see operation data table




D_{min} minimum bore diameter depending on cutter diameter
 D_{max} maximum bore diameter depending on cutter diameter

DIMENSIONS AND OPERATION DATA

Spinworx® - radius 10 mm


MILLING CUTTER BODIES		Catalogue No.	d ₁	d	r	d ₂	d ₃	l ₂	l ₃	z
Shell type milling cutter bodies										
	7 100 340/7 DR	100	20	10	32	70	5,5	53	7	
	8 125 340/7 DR	125	20	10	40	90	5,5	53	8	
	10 160 340/7 DR	160	20	10	40	120	5,5	53	10	
	12 200 340/7 DR	200	20	10	60	160	7	58	12	

Accessories

ACCESSORIES	Catalogue No.	Description	Dimensions			
	TV 1-5	screwdriver torque Vario®-S with window scale	Nm 1,0 - 5,0	with scale		
	T20 500	Torx-interchangeable bit	T 20	L 175	max. 8,0 Nm	
	T20 502	Torx magicspring interchangeable blade	T 20	L 175	max. 8,0 Nm	

Clamping torque for torx size T20 M₆: 2,5 Nm

Spinworx®-inserts

INDEXABLE INSERTS	Catalogue No.	DIN-Identification	kind for material	kind of chips	d	r
	06 20 8A0 DR	ROHX20	Steel/Cast Iron	short-chipping	20	10

Inserts and pins only available as kits.



Cutting Speeds V_c in m/min

MATERIAL		d	r	kind of machining	*8A0 DR
Steel		20	10	roughing finishing	100 – 300 150 – 350
Cast Iron		20	10	roughing finishing	120 – 220 160 – 250

Application data (f_z/a_p)

MATERIAL		d	r	machining rates	*8A0 DR
Steel		20	10	f_z (mm) a_p (mm)	0,25 – 0,6 0,2 – 4,0
Cast Iron		20	10	f_z (mm) a_p (mm)	0,25 – 0,6 0,2 – 4,0

These speed and feed values are approximate.

Extended operation data

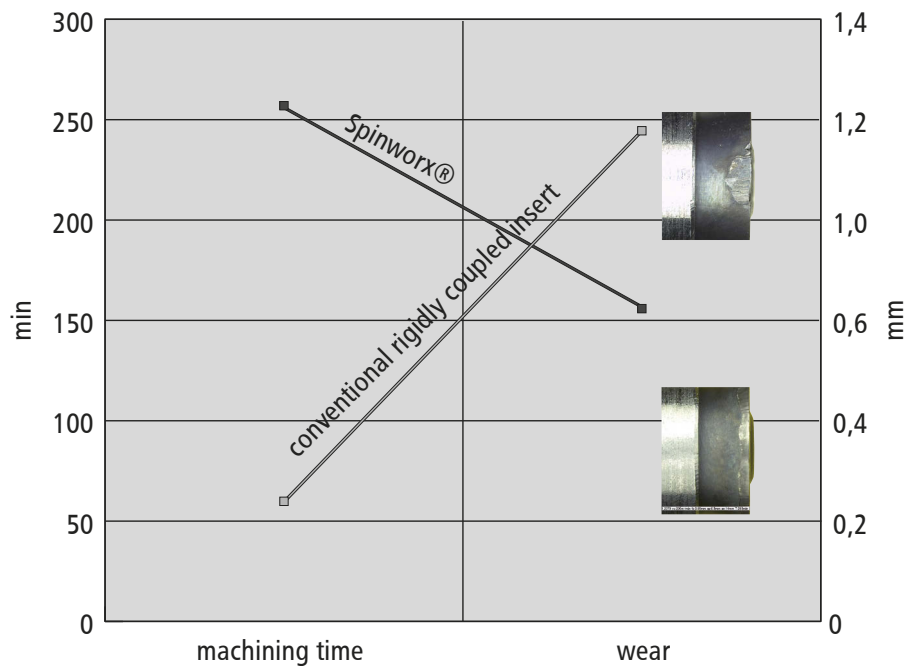
axial plunging into solid block		ramping		circular milling into solid block	
Cutter diam. $\varnothing d_1$ mm	x max. mm		a°		D_{min} mm
100	5,5		< 4,6		162
125	5,5		< 3,3		212
160	5,5		< 2,3		282
200	7		< 2		362
			y mm		D_{max} mm
			62		200
			87		250
			122		320
			162		400

x maximum plunge depth
 f_z see operation data table, but reduce value to 30%

y minimum travel
 a_p/f_z see operation data table

D_{min} minimum bore diameter depending on cutter diameter
 D_{max} maximum bore diameter depending on cutter diameter

COMPARISON



After a machining time of 265 minutes, we have identified a wear land of 0.63 mm for our Spinworx®-inserts. The end of cutting-edge life was still far away.

The conventional rigidly coupled insert showed a wear land of 1.17 mm after only 60 minutes (1 side of insert). This was the end of insert life.

FROM PRACTICE TO PRACTICE

Hermesmeyer & Greweling, Marienfeld:

Hermesmeyer & Greweling from the town of Marienfeld near Gütersloh has a lot of professional knowing in milling operations. Founded in 1982 from Hubert Hermesmeyer and Herman Greweling, the company is well known for its expertise in milling strategies for mechanical and plant engineering, mould- and tool-making as well as machine building. High-performance software and an integrated cross-linked machinery of NC- and highspeed machines of well-known manufacturers guarantee flexibility and prime quality without compromises.

Also, today's managing directors Klaus Hermesmeyer and

Klaus Greweling are not compromising in selecting their tooling. As one of the first, they were trying our new system Spinworx®. In substantial tests, this new Pokolm-innovation with automatically revolving inserts, had to prove its advantages and abilities. Klaus Greweling: "At first, the idea of an insert revolving around a threaded stud-bolt support created a lot of scepticism. The tests, however, resulted in proving, that this technology is operating efficiently and is very beneficial in certain materials."

FROM PRACTICE TO PRACTICE

JOB TITLE:

This test is related to an order of the automotive industry, where precision, accuracy and the time factor are most important.

The initial component was a 1.7131-steel blank. The requirement has been: milling a trimming tool for the side-wall of a tank cap-insert. The final finishing operation should take place after assembling this item to the moulding tool. Target was, to machine this blank completely to a finished part in only very few machi-

ning hours, preferably unattended.

For the test-run, our senior partner Franz-Josef Pokolm took a **Spinworx®** milling cutter body 6 52 310/7DR 52 mm diam. r6, with 12 mm diam. inserts. The milling machine available was a DMU 200 P with an output of 42 kW and a tool-holder system of SK50. The demanded two-sided-milling operation required a reset of the machine. The blank was machined from top to bottom and from outside to inside at a time.

MACHINE

Deckel Maho
DMU 200 P

MATERIAL

1.7131

Milling the blank-geometry was the main load of this job. This milling process took 114 minutes with a feed rate of 4.500 mm/min and a cutting depth of 1.25 mm. For the bottom part, the machine needed further 58 minutes. The milling machine operator Karl-Wilhelm Dangberg was very satisfied with this result: „The finished part

could be integrated immediately into the trimming tool. Certainly, the time-saving through avoiding re-locating of inserts is a substantial argument for Spinworx®. But, more significant to me as a machine operator is the unbelievable higher process reliability“

EXAMPLE FROM PRACTICE:

component: tank cap-insert
material: 1.7131
arbor: 100 22 710 (22 mm diam., SK 50; DIN 69 871 A)
cutter body: 6 52 310/7 DR (52 mm diam., r6)
insert: 03 12 8A0 DR, (12 mm diam.)
overhang: 155 mm
cooling: air through spindle
v_c (speed.): 250 m/min
v_f (feed rate): 4500 mm/min
S (revolutions): 1530 1/min
f_z (feed per tooth): 0.49 mm
a_p (depth of cut): 1.25 mm
a_e (width of cut): 38 mm
machining time: 1. side 114 min
2. side 58 min

RESULT:

Franz-Josef Pokolm has carefully examined the **Spinworx®**-inserts. The result: After a total machining time of 172 minutes, there was practically no wear at all, even with 30 times magnification. You could easily continue to use these inserts for further operations. Conclusion: With the tool system **Spinworx®** from Pokolm, extremely short machining times and at the same time, minimized tool costs can be achieved. Further advantages are: - optimized process reliability, unattended machining and , apart from the reset of the machine for top- and bottom-machining, no downtimes. Result: Extensive reduced component costs and a distinct time saving.



SPINWORX®

P-F-SP-E 1009

→ CONTACT

Pokolm
Frästechnik GmbH & Co. KG
Adam-Opel-Straße 5
33428 Harsewinkel
Germany

fon: +49 5247 93 61-0
fax: +49 5247 93 61-99

email: info@pokolm.de
internet: www.pokolm.com

